

RAIN BIRD



LOW FLOW SPRINKLER (LF 2400)..... Pg. 128 - 129




LF2400



DESCRIPTION	CODE	PRICE
LF2400 "Body and Drive unit only" (No Nozzle/Deflector)	LF2400	R165.00

SPARES

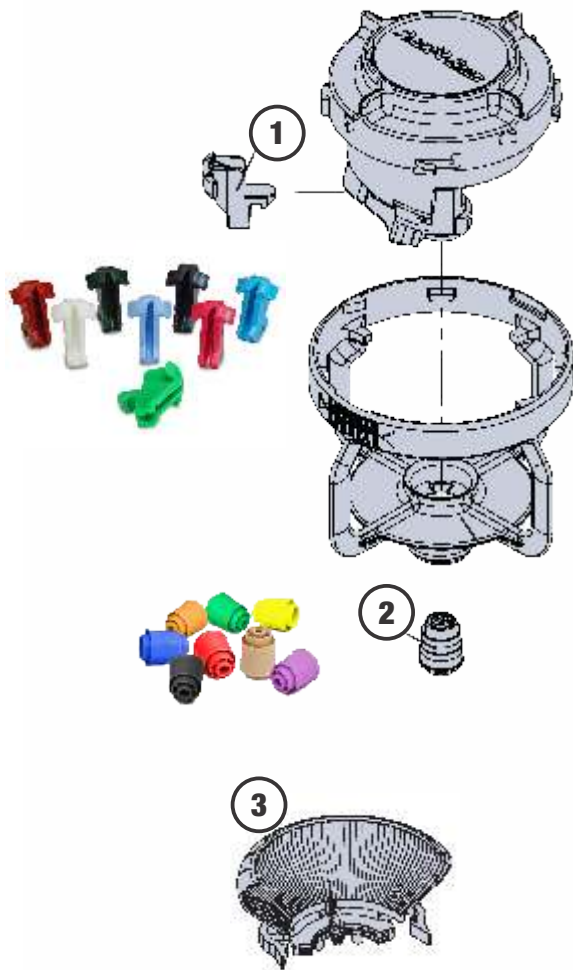

NR	DESCRIPTION	CODE	PRICE
1	Deflector	LF2400-D Angle?	R11.30
2	Nozzle	LF2400-NZ Size?	R8.00
3	Edge Guard	LF2400 - EDGE	R130.00

Please ensure to select a matching nozzle and deflector combination



LF2400

Matrix of Assemblies	Deflector	Nozzle	Stream Height (cm)	Flow Rates as standard pressures (lph) Throw radius at given nozzle and standard pressure (m)							
				1.7 bar	2.1 bar	2.4 bar	2.8 bar	3.1 bar	3.5 bar	3.8 bar	4.2 bar
				25psi	30psi	35psi	40psi	45psi	50psi	55psi	60psi
10 Degree Lime	Green 7/64"-2.76mm	50-96	384 8.1	420 8.7	454 9.0	488 9.6	518 9.9	556 10.2	584 10.2	613 10.5	
	Tan 30 Drill-2.97mm	60-96	447 8.7	493 9.0	534 9.6	575 9.9	606 10.2	638 10.5	670 10.5	702 10.8	
	Red 1/8"-3.18mm	60-104	509 9.0	568 9.6	613 9.9	656 10.2	697 10.5	727 10.8	763 10.8	799 10.8*	
	Black 29 Drill-3.38mm	67-121	572 9.0	638 9.6	688 9.9	738 10.5	784 10.5	818 10.8	852 10.8	881 11.1	
	Silver 9/64"-3.63mm	81-111	665 9.6	743 10.2	802 10.5	858 10.8	913 11.1				
13 Degree Maroon	Green 7/64"-2.76mm	71-127	384 9.0	420 9.3	454 9.6	488 9.9	518 10.2	556 10.2	584 10.5	613 10.5	
	Tan 30 Drill-2.97mm	76-121	447 9.3	493 9.6	534 9.9	575 10.8	606 10.5	638 10.8	670 10.8	702 10.8	
	Red 1/8"-3.18mm	81-124	509 9.3	568 9.9	613 10.2	656 10.5	697 10.8	727 11.1	763 11.4	799 11.1	
	Black 29 Drill-3.38mm	86-127	572 9.6	638 9.9	688 10.2	738 10.5	784 10.8	818 10.8	852 11.1	881 11.1	
	Silver 9/64"-3.63mm	96-137	665 9.9	743 10.8	802 11.1	858 11.4	913 11.7				
15 Degree Tangerine	Green 7/64"-2.76mm	81-127	384 9.3	420 9.6	454 9.9	488 10.2	518 10.5	556 10.5	584 10.8	613 11.7	
	Tan 30 Drill-2.97mm	71-127	447 9.0	493 9.9	534 10.2	575 10.8	606 10.8	638 10.8	670 11.1	702 11.1	
	Red 1/8"-3.18mm	88-137	509 9.6	568 10.8	613 10.5	656 11.1	697 11.1	727 11.1	763 11.1	799 11.1	
	Black 29 Drill-3.38mm	101-170	572 9.6	638 10.8	688 11.1	738 11.4	784 11.4	818 11.7	852 11.7	881 12.0	
	Silver 9/64"-3.63mm	106-144	665 10.2	743 10.8	802 11.1	858 11.7	913 11.7				
22 Degree Dark Green	Green 7/64"-2.76mm	162-241	384 10.8	420 11.4	454 11.4	488 11.4	518 11.7	556 11.7	584 11.7	613 11.7	
	Tan 30 Drill-2.97mm	162-246	447 10.8	493 11.4	534 11.7	575 12.0	606 12.3	638 12.3	670 12.3*	702 12.6	
	Red 1/8"-3.18mm	170-254	509 10.8	568 11.7	613 12.0	656 12.3	697 12.3	727 12.9	763 12.9	799 13.2	
	Black 29 Drill-3.38mm	187-304	572 11.4	638 12.3	688 12.6	738 12.6	784 12.9	818 13.2	852 13.2	881 13.2	
	Silver 9/64"-3.63mm	182-259	665 11.7	743 12.0	802 12.9	858 13.2	913 13.5				
27 Degree Black	Silver 9/64"-3.63mm	193-295	679 11.6	743 12.2	804 12.2	859 12.8	911 13.4	961 13.7	1006 14.0	1052 14.0	
	Brown 5/32"-3.97mm	198-300	827 11.6	906 12.2	979 12.8	1045 13.4	1108 13.4	1170 13.7	1226 14.0	1281 14.0	
	Dark Grey 11/64"-4.37mm	203-305	999 12.2	1095 12.8	1183 13.4	1265 14.3	1342 14.6	1415 14.6	1483 14.6	1549 15.2	

NOTE: Performance data is based on a 30cm riser.
*** Estimated – based on results of similar pressures**

