



TONY
TURNER
AGENCIES

Bailey

High Pressure..... Pg.10-11

Low Pressure..... Pg.12

Heavy duty PTFE Pg.13



HIGH PRESSURE



Bailey®

PVC SOLVENT CEMENTS AND CLEANER FOR PVC PIPE & FITTINGS

ASTM International D-2564:

The ASTM D-2564 covers requirements for PVC solvent cements used in PVC piping systems.

Key requirements of this standard are:

- Lap Shear Strength – 62 Bar after 72 hours curing time.
- Hydrostatic Burst Strength – 27 Bar after 2 hour curing time.
- Resin Content
- Dissolution
- Viscosity



Low VOC:
VOC – Volatile Organic Compounds, less than 510 grams per litre. Ideal for use in Green Building construction.

Bailey® L-5023

HIGH PRESSURE- INDUSTRIAL GRADE

Clear- Heavy bodies, excellent gap filling properties

- Domestic and Industrial PVC piping systems including drinking water, irrigation, pool and spa, waste water and drainage water, ventilation systems.
- Suitable for Class 4 through Class 25 PVC Pipe up to 300mm in diameter (non-pressure application up to 450mm).

L-5023 Low VOC PVC Solvent Cement meets both the ASTM International D-2564 and the USA National Sanitation Foundation (NSF), NSF/ANSI 61 drinking water health standard.

- Shelf Life: 3 years in tightly sealed container



SIZE	CODE	DESCRIPTION	PRICE
118ML TIN- 48/CARTON	TAN-BAILEY118	118ML PVC HIGH PRESSURE	R62.70
237ML TIN- 24/CARTON	TAN-BAILEY237	237ML PVC HIGH PRESSURE	R89.80
473ML TIN- 12/CARTON	TAN-BAILEY473	473ML PVC HIGH PRESSURE	R176.40
946ML TIN- 12/CARTON	TAN-BAILEY946	946ML PVC HIGH PRESSURE	R297.60
100ML TUBE	TAN-BAILEY100H	100ML PVC HIGH PRESSURE	R48.80
50ML TUBE DISPLAY BOX- 24/BOX	TAN-BAILEY050H	50ML X24TUBES PVC HIGH PRESSURE + DISPLAY BOX	R557.10

www.ftagencies.co.za



Prices exclude V.A.T

HIGH PRESSURE & CLEANER

Bailey® L-6453

HIGH PRESSURE – FAST CURING

Blue – Medium bodied, extremely fast setting/cementing

- Ideal for use where working conditions are wet/high humidity and/or quick pressurisation is required
- Domestic and industrial PVC piping systems including drinking water, irrigation, pool & spa suitable for Class4 through Class 25 PVC pipe up to 300mm in diameter

L-6453 Low VOC PVC Solvent Cement meets both the ASTM International D-2564 and the USA National Sanitation Foundation (NSF), NSF/ANSI 61 drinking water health standard.

Shelf Life: 3 years in tightly sealed container



SIZE	CODE	DESCRIPTION	PRICE
237ML TIN- 24/CARTON	TAN-BAILEY237-BLUE	237ML BLUE QUICK SET HIGH PRESSURE	R92.90
473ML TIN- 12/CARTON	TAN-BAILEY473-BLUE	473ML BLUE QUICK SET HIGH PRESSURE	R112.60

Bailey® C-1020

PVC/ABS PIPE AND FITTINGS CLEANER

Clear – Water Thin

- Effectively removes surface dirt, grease and grime from the bonding surface of PVC/CPVC/ABS pipes and fittings.
- Helps to soften PVC pipe and fittings



TIN SIZE	CODE	DESCRIPTION	PRICE
473ML- 12/CARTON	TAN-CLN-473	473ML BAILEY CLEANER	R102.60

LOW PRESSURE



Bailey® 3061

LOW PRESSURE
Clear- medium Bodied

- PVC piping systems for waste water, drainage and ventilation systems as well as electrical and communication PVC conduit.
- Suitable for class 4 through class 12 PVC pipe up to 150mm in diameter

Shelf Life: 2 years in tightly sealed container



TIN SIZE	CODE	DESCRIPTION	PRICE
100ML/125G- 48/CARTON	TAN-BAILEY100L	100ML LOW PRESSURE	R21.40
200ML/250G- 24/CARTON	TAN-BAILEY200L	200ML LOW PRESSURE	R31.50
400ML/500G- 12/CARTON	TAN-BAILEY400L	400ML LOW PRESSURE	R54.90
100ML TUBE 20/DISPLAY BOX	TAN-BAILEY100LP	100ML X20TUBES LOW PRESSURE + DISPLAY BOX	R406.30



Each tin has a size appropriate daub/applicator attached to the lid that makes the use/application of the solvent easy and consistent.

www.ftagencies.co.za






TONY
TURNER
AGENCIES

HEAVY DUTY PTFE

CODE	WIDTH	LENGTH	THICKNESS	DENSITY	COMMENTS	PACKING	PRICE
PTFE-012H	12MM	10M	0.100MM	0.45g/cm3	HIGH DENSITY	10/100/500	R5.00
PTFE-019H	19MM	40M	0.100MM	0.45g/cm3	HIGH DENSITY	10/100/500	R27.78

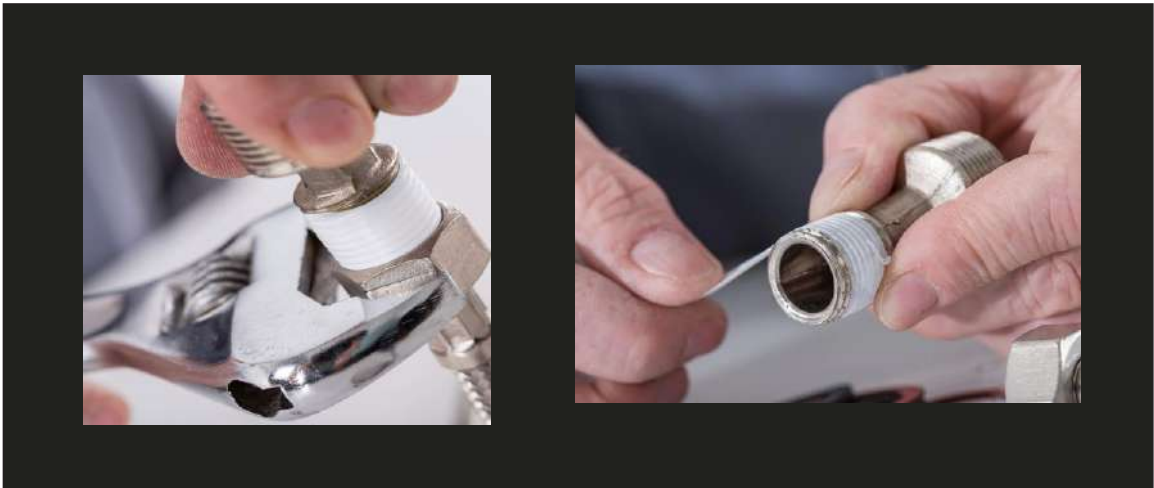

www.ftagencies.co.za



Prices exclude V.A.T



WITH THANKS
water2000
IRRIGATION EQUIPMENT AND CONSULTANTS